

Fused (WDM) Wavelength Division Multiplexer (980/1064, 980/1053nm)

Specifications

Contact Hengyan Photonics with your custom specification needs.

Parameter		Unit	980/1064, or 980/1053
Operating Wavelength		nm	(980 and 1064), or (980 and 1053)
Operating Bandwidth		nm	±5
Isolation	Min	dB	15
Insertion Loss	Max	dB	0.3
PDL	Max	dB	0.10
Directivity	Min	dB	55
Optical Power Handling	Max	W	4
Operating Temperature		°C	-40 to 85
Storage Temperature		°C	-40 to 85

* The above specifications are for parts without connectors. Adding connectors can affect the IL, & PDL.


* SOP=State Of Polarization

Packaging

Contact Hengyan Photonics with your custom configuration needs.

Parameter		250μm bare fiber	900μm loose tube	900μm/2mm/3mm loose tube
Configuration		1x2 or 2x2		
Dimension	mm mm	φ3.0 x L40 Φ3.0 x L54	φ3.0 x L54 φ3.0 x L56	L90 x W20 x T10

Package Diagram

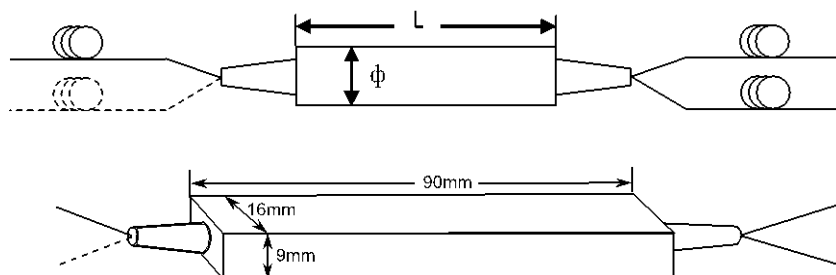

(Page 2)

Fused (WDM) Wavelength Division Multiplexer (980/1064, 980/1053nm)

Ordering Information

Contact Hengyan Photonics with your custom configuration needs.

WDMC	Wavelength	Ports	Package	Fiber Type	Cable Type	Fiber Length	Connector
WDMC	90=980/1064	12=1x2	A40= $\phi 3.0 \times L40$	H1=Hi 1060	B=250um	10= 1.0m	NE=None
	980/1053=	22=2x2	A54= $\phi 3.0 \times L54$	F1=Flexcore 1060	L=900um	15=1.5m	FA=FC/APC
	980/1053		A56= $\phi 3.0 \times L56$		W=2mm	20=2.0m	FC=FC/PC
	X=Others		C10=L90 $\times$ W20 $\times$ T10	X=Others	H=3mm	X=Others	SA=SC/APC
			X=Others		X=Others		SC=SC/PC
							LC=LC/PC
							X=Others