

Fused (WDM) Wavelength Division Multiplexer: Mixed Fiber (980/1550nm)

Specifications

Contact Hengyan Photonics with your custom specification needs.

Parameter		Unit	980/1550
Operating Wavelength		nm	980 and 1550
Operating Bandwidth		nm	±15
Isolation	Min	dB	20
Insertion Loss	Max	dB	0.25
PDL	Max	dB	0.05
Directivity	Min	dB	55
Optical Power Handling	Max	W	4
Operating Temperature		°C	-40 to 85
Storage Temperature		°C	-40 to 85

* The above specifications are for parts without connectors. Adding connectors can affect the IL, & PDL.


* SOP=State Of Polarization

Packaging

Contact Hengyan Photonics with your custom configuration needs.

Parameter		250μm bare fiber	900μm loose tube	900μm/2mm/3mm loose tube
Configuration		1x2 or 2x2		
Fiber Type	Common & Pump Port	-	Corning HI 1060, Corning 1060 Flexcore	
	Signal Port	-	Corning SMF-28	
Dimension	mm	Φ3.0 x L40	Φ3.0 x L54	L90 x W20 x T10
	mm	Φ3.0 x L54	Φ3.0 x L56	

Package Diagram

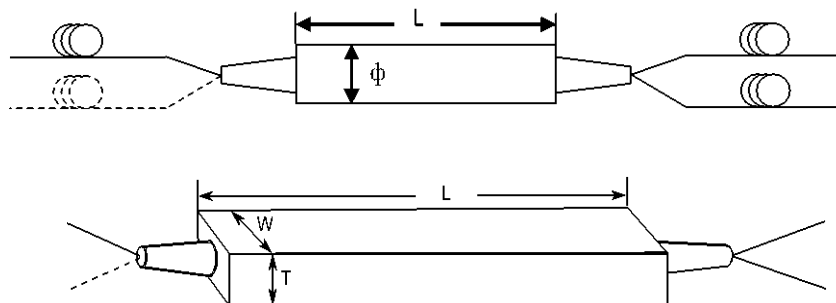

(Page 2)

Fused (WDM) Wavelength Division Multiplexer: Mixed Fiber
(980/1550nm)

Ordering Information

Contact Hengyan Photonics with your custom configuration needs.

WDMC	Wavelength	Ports	Package	Fiber Type	Cable Type	Fiber Length	Connector
WDMC	95=980/1550	12=1x2	A40= $\Phi 3.0 \times L40$	S=SMF-28 fiber	B=250um	10= 1.0m	NE=None
	X=Others	22=2x2	A54= $\Phi 3.0 \times L54$	H1=Hi 1060	L=900um	15=1.5m	FA=FC/APC
			A56= $\phi 3.0 \times L56$	F1=Flexcore 1060	W=2mm	20=2.0m	FC=FC/PC
			C10=L90 $\times$ W20 $\times$ T10	X=Others	H=3mm	X=Others	SA=SC/APC
			X=Others		X=Others		SC=SC/PC
							LC=LC/PC
							X=Others